

**FANER**  
LIVE · FOR · BRAND

ISO Certificate Factory



**SGS**

**amfori**  **BSCI**  
Trade with purpose



**2020**

**LED户外灯具**

LED OUTDOOR LIGHTING

**目录**

**中山梵尔照明科技有限公司**

ZHONGSHAN FANER LIGHTING TECHNOLOGY CO.,LTD.

Tel: 86-0760-22326120 Fax: 86-0760-22326120

Contact: Jason Lian +86-18576003768

E-mail: sales01@fanerled.com

Website: www.faner-led.com

Add: No.2 Henglong Road, Tongyi Industrial Park,  
Guzhen Town, Zhongshan City, China.

联系人: 石先生 18576003368 / 练先生 18576003768

地址: 广东省中山市古镇镇同益工业园恒隆路2号

**中山梵尔照明科技有限公司**

ZHONGSHAN FANER LIGHTING TECHNOLOGY CO.,LTD.

# 公司介绍

Company Introduction



## 2013

Factory found, Located in Zhongshan, a famous lighting city.  
公司成立, 中山古镇——著名的灯具之都。

## 2014

Start own die-casting factory (make housing in house).  
开设压铸厂(事业部), 奠定产业基础

## 2015

3,000,000 pcs panel / year, one of biggest aluminum panel.  
小面板灯突破300万套/年。

## 2016

Sales turn-over more than 20,000,000 USD.  
年产值大于2000万美金。

## 2017

Start Outdoor business division.  
户外事业部成立。

## 2018

Build standard quality control system, sales turn-over more than 25,000,000 USD.  
建立标准的管理体系, 年销售额大于2500万美金。

## 2019

Outdoor division more than 10,000,000 USD annual turn-over, can produce 2,000,000 pcs flood light, street light, high bay etc., ISO9001:2015 Certification done by SGS.  
户外事业部年销售额超过1000万美金, 每年可以生产200万支投光灯, 路灯, 工矿灯等。通过SGS的ISO9001质量体系认证。

## 2020

To build more stronger produce line of outdoor light and solar outdoor light. Total follow Philips etc. world brand control system.  
打造太阳能、户外产品的产品线和竞争力, 导入飞利浦等国际大品牌的研发, 品质的国际管理标准。

## 2021

Will produce in 60,000 own industry park.  
入驻27亩, 60000平方米自建工业园。

# 荣誉证书

## Honor Certificate

”

证书  
Certificate



颁发单位  
Issued by

政府  
Government

细节  
Details

ISO9001 质量保证体系  
ISO9001 Quality Assurance System




必维国际检验集团  
Bureau Veritas (BV)

商业社会标准认证  
Business Social Compliance Initiative



政府  
Government

高新技术企业  
High-tech Enterprises

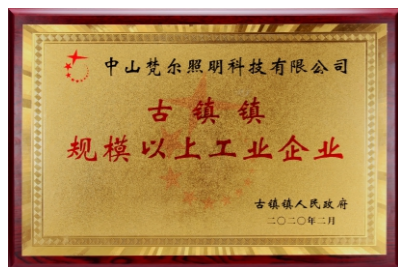

政府  
Government

规模以上工业企业  
Industrial Enterprises Above Designated Size





## 产品认证

### Product Certifications



# 先进设备 ”

Advanced Equipment

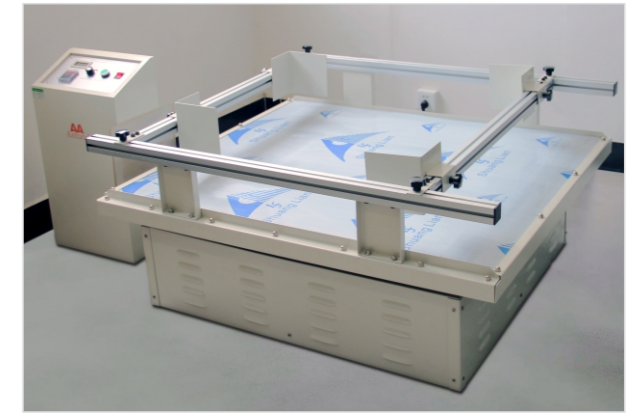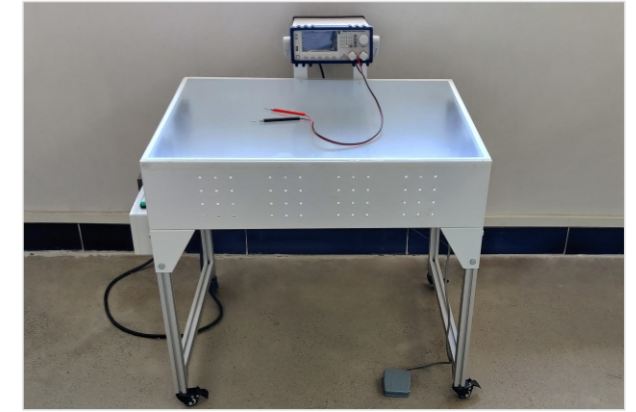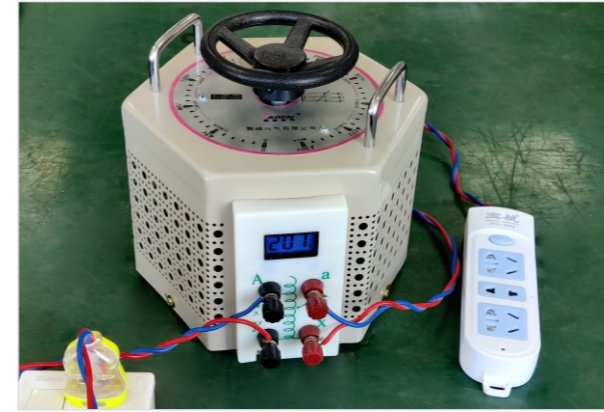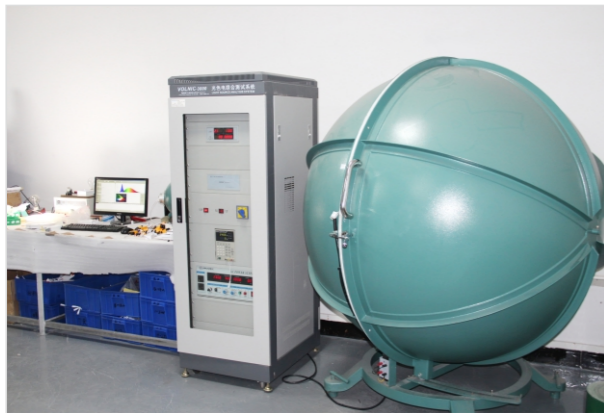

# 商照事业部

Commercial Lighting Division



# 户外事业部

Outdoor Lighting Division



# 太阳能灯事业部 ”

Solar Lighting Division



# 压铸厂 ”

Die-casting Factory



# 目录

CATALOG

## LED 路灯

P01



E102  
P03



E103  
P05



E101  
P07



E204  
P09



E214  
P11



E205  
P13

## LED 投光灯

P15



F111  
P17



F111B  
P19



F112  
P21



F105  
P23



F103  
P25



F109  
P27



F210  
P29



F232  
P31



F209  
P33

## LED 工矿灯

P35



U101  
P37



U209  
P39



U210  
P41

# LED路灯

ROAD LIGHT







## E102 SERIES

- \* 新款流畅设计
- \* 高效散热
- \* 智能防水控制设计
- \* 高质量驱动



技术参数									
功率	材质	输入电压	功率因素	灯珠	光效	色显	发光角度	防水等级	认证
20W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	70°*140°	IP65	BIS/CB/CE
30W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	70°*140°	IP65	BIS/CB/CE
50W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	70°*140°	IP65	BIS/CB/CE
100W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	70°*140°	IP65	BIS/CB/CE
150W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	70°*140°	IP65	BIS/CB/CE



## E103 SERIES

- \* 专业的路灯设计
- \* 光学镜片设计
- \* 贴片灯珠SMD5050, 150lm/w
- \* 可选择明纬, 飞利浦驱动



技术参数									
功率	材质	输入电压	功率因素	灯珠	光效	色显	发光角度	防水等级	认证
50W	铝+透镜	100-270V	0.95	SMD3030	100-150lm/W	70	70°*140°	IP65	BIS/CB/CE
100W	铝+透镜	100-270V	0.95	SMD3030	100-150lm/W	70	70°*140°	IP65	BIS/CB/CE
150W	铝+透镜	100-270V	0.95	SMD3030	100-150lm/W	70	70°*140°	IP65	BIS/CB/CE
200W	铝+透镜	100-270V	0.95	SMD3030	100-150lm/W	70	70°*140°	IP65	BIS/CB/CE



## E101 SERIES

- \* 专业设计
- \* 光学镜片
- \* 高质量驱动



SASO CB IEC60335 IEC60598 CE RoHS

IK08 IP65 UV Proof Salt Spray 240hrs High-low Temp. 500hrs

### Technical Parameters

功率	材质	输入电压	功率因素	灯珠	光效	色显	发光角度	防水等级	认证
20W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	70°*140°	IP65	BIS/CB/CE
24W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	70°*140°	IP65	BIS/CB/CE
36W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	70°*140°	IP65	BIS/CB/CE
50W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	70°*140°	IP65	BIS/CB/CE
70W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	70°*140°	IP65	BIS/CB/CE
100W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	70°*140°	IP65	BIS/CB/CE



## E204 SERIES

- \* COB 配光
- \* 重壳
- \* 高质量COB灯珠和驱动



SASO CB IEC60335 IEC60598 CE RoHS

IK08 IP65 UV Proof Salt Spray 240hrs High-low Temp. 500hrs

### 技术参数

功率	材质	输入电压	功率因素	灯珠	光效	色显	发光角度	防水等级	认证
50W	铝+透镜	100-270V	0.95	COB	100lm/W	70	>90°	IP65	BIS/CB/CE
100W	铝+透镜	100-270V	0.95	COB	100lm/W	70	>90°	IP65	BIS/CB/CE
150W	铝+欧静	100-270V	0.95	COB	100lm/W	70	>90°	IP65	BIS/CB/CE
200W	铝+透镜	100-270V	0.95	COB	100lm/W	70	>90°	IP65	BIS/CB/CE
250W	铝+透镜	100-270V	0.95	COB	100lm/W	70	>90°	IP65	BIS/CB/CE



## E214 SERIES

- \* 重壳, 高质量散热器
- \* 光学透镜
- \* 高质量驱动



SASO CB IEC60335 IEC60598 CE RoHS

IK08 IP65 UV Proof Salt Spray 240hrs High-low Temp. 500hrs

### 技术参数

功率	材质	输入电压	功率因素	灯珠	光效	色显	发光角度	防水等级	认证
50W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	>90°	IP65	BIS/CB/CE
100W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	>90°	IP65	BIS/CB/CE
150W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	>90°	IP65	BIS/CB/CE
200W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	>90°	IP65	BIS/CB/CE



## E205 SERIES

- \* 专业设计
- \* 光学透镜
- \* 高质量驱动




技术参数									
功率	材质	输入电压	功率因素	灯珠	光效	色显	发光角度	防水等级	认证
30W	铝+透镜	100-270V	0.95	SMD3030/SMD5050	100lm/W	70	>90°	IP65	BIS/CB/CE
50W	铝+透镜	100-270V	0.95	SMD3030/SMD5050	100lm/W	70	>90°	IP65	BIS/CB/CE
100W	铝+透镜	100-270V	0.95	SMD3030/SMD5050	100lm/W	70	>90°	IP65	BIS/CB/CE
150W	铝+透镜	100-270V	0.95	SMD3030/SMD5050	100lm/W	70	>90°	IP65	BIS/CB/CE
200W	铝+透镜	100-270V	0.95	SMD3030/SMD5050	100lm/W	70	>90°	IP65	BIS/CB/CE
240W	铝+透镜	100-270V	0.95	SMD3030/SMD5050	100lm/W	70	>90°	IP65	BIS/CB/CE

# LED投光灯

FLOOD LIGHT



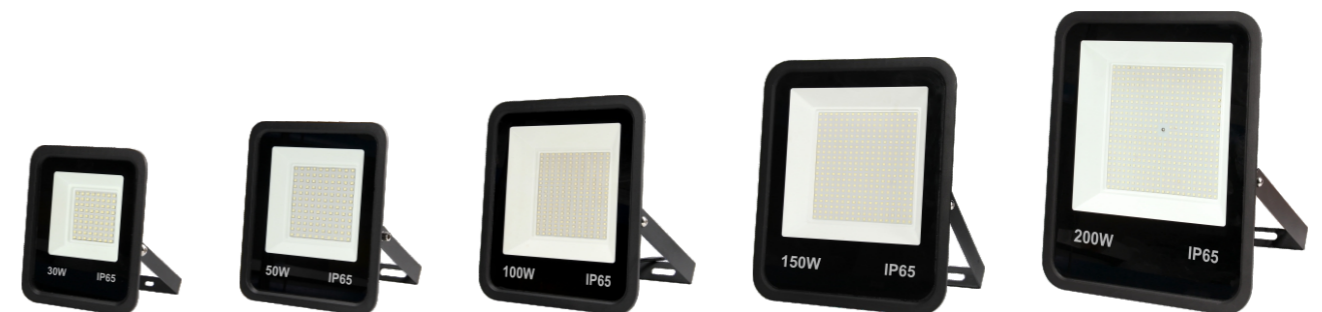

## F111 SERIES

- \* 轻巧的设计
- \* 高质量散热器
- \* 高亮度, 100lm/w
- \* 高质量驱动
- \* 有竞争力的价格

SASO CB IEC60335 IEC60598 CE RoHS

IK08 IP65 UV Proof Salt Spray 240hrs High-low Temp. 500hrs

### 技术参数

功率	材质	输入电压	功率因素	灯珠	光效	色显	防水等级	认证
30W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
50W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
100W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
150W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
200W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE





## F111B SERIES

- \* 轻巧的设计
- \* 高质量散热器
- \* 高亮度, 100lm/w
- \* 高质量驱动
- \* 有竞争力的价格



### 技术参数

功率	材质	输入电压	功率因素	灯珠	光效	色显	防水等级	认证
30W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
50W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
100W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
150W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
200W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE



## F112 SERIES

- \* 轻巧的设计
- \* 高质量散热器
- \* 高亮度, 100lm/w
- \* 高质量驱动
- \* 有竞争力的价格



SASO CB IEC60335 IEC60598 CE RoHS


IK08 IP65 UV Proof Salt Spray 240hrs High-low Temp. 500hrs

技术参数								
功率	材质	输入电压	功率因素	灯珠	光效	色显	防水等级	认证
10W	铝+玻璃	100-240V / 200-240V	0.95	SMD2835	80lm/W	80	IP65	BIS/CB/CE
20W	铝+玻璃	100-240V / 200-240V	0.95	SMD2835	80lm/W	80	IP65	BIS/CB/CE
30W	铝+玻璃	100-240V / 200-240V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
50W	铝+玻璃	100-240V / 200-240V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
100W	铝+玻璃	100-240V / 200-240V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
150W	铝+玻璃	100-240V / 200-240V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
200W	铝+玻璃	100-240V / 200-240V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE



## F105 SERIES

- \* 高档工业照明设计
- \* 高效散热器
- \* 高质量驱动和高亮灯珠
- \* 3/5 年质保



### 技术参数

功率	材质	输入电压	功率因素	灯珠	光效	色显	防水等级	认证
10W	铝+玻璃	100-270V	0.95	SMD2835	80lm/W	80	IP65	BIS/CB/CE
20W	铝+玻璃	100-270V	0.95	SMD2835	80lm/W	80	IP65	BIS/CB/CE
30W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
50W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
100W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
150W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
200W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE



## F103 SERIES

- \* 高档工业照明设计
- \* 高效散热器
- \* 高质量驱动和高亮灯珠
- \* 3/5 年质保



SASO CB IEC60335 IEC60598 CE RoHS


IK08 IP65 UV Proof Salt Spray 240hrs High-low Temp. 500hrs

技术参数								
功率	材质	输入电压	功率因素	灯珠	光效	色显	防水等级	认证
30W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
50W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
100W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
150W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE



## F109 SERIES

- \* 高档工业照明设计
- \* 高效散热器
- \* 高质量驱动和高亮灯珠



### 技术参数

功率	材质	输入电压	功率因素	灯珠	光效	色显	防水等级	认证
10W	铝+玻璃	100-270V	0.95	SMD2835	80lm/W	80	IP65	BIS/CB/CE
20W	铝+玻璃	100-270V	0.95	SMD2835	80lm/W	80	IP65	BIS/CB/CE
30W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
50W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
100W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE
150W	铝+玻璃	100-270V	0.95	SMD2835	100lm/W	80	IP65	BIS/CB/CE



## F210 SERIES

- \* 光学透镜设计
- \* 高效散热器
- \* 高质量驱动
- \* 高质量贴片灯珠SMD3030



### 技术参数

功率	材质	输入电压	功率因素	灯珠	光效	色显	防水等级	认证
30W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	IP65	BIS/CB/CE
50W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	IP65	BIS/CB/CE
100W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	IP65	BIS/CB/CE
150W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	IP65	BIS/CB/CE
200W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	IP65	BIS/CB/CE



## F232 SERIES

- \* 光学透镜设计
- \* 高效散热器
- \* 高质量驱动
- \* 高质量特片灯珠SMD3030



SASO CB IEC60335 IEEF CE RoHS

IK08 IP65 UV Proof Salt Spray 240hrs High-low Temp. 500hrs

技术参数								
功率	材质	输入电压	功率因素	灯珠	□□	色显	防水等级	认证
50W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	IP65	BIS/CB/CE
100W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	IP65	BIS/CB/CE
150W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	IP65	BIS/CB/CE
200W	铝+透镜	100-270V	0.95	SMD3030	100lm/W	70	IP65	BIS/CB/CE



## F209 SERIES

\* 60° 发光角度, 光线分布均匀

\* 高效散热器

\* 高质量驱动



SASO CB IEC60335 CE RoHS

IK08 IP65 UV Proof Salt Spray 240hrs High-low Temp. 500hrs

### 技术参数

功率	材质	输入电压	功率因素	灯珠	□□	色显	防水等级	认证
50W	铝+玻璃	100-270V	0.95	COB	100lm/W	70	IP65	BIS/CB/CE
100W	铝+玻璃	100-270V	0.95	COB	100lm/W	70	IP65	BIS/CB/CE
150W	铝+玻璃	100-270V	0.95	COB	100lm/W	70	IP65	BIS/CB/CE
200W	铝+玻璃	100-270V	0.95	COB	100lm/W	70	IP65	BIS/CB/CE
300W	铝+玻璃	100-270V	0.95	COB	100lm/W	70	IP65	BIS/CB/CE
400W	铝+玻璃	100-270V	0.95	COB	100lm/W	70	IP65	BIS/CB/CE
600W	铝+玻璃	100-270V	0.95	COB	100lm/W	70	IP65	BIS/CB/CE



# LED工矿灯

HIGH BAY LIGHT





## U101 SERIES

\* 90°/60°/120°发光角度可选择

\* 高效散热器

\* BIS /CE 认证驱动, MW, PHILIPS, SOSEN 驱动

\* PHILIPS, SAMSUNG, SANAN 灯珠

SASO CB IEC60335 IEC60598 CE RoHS

IK08 IP65 UV Proof Salt Spray 240hrs High-low Temp. 500hrs


### 技术参数

功率	材质	输入电压	功率因素	灯珠	光效	色显	防水等级	发光角度	认证
80W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°/60°/120°	BIS/CB/CE
100W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°/60°/120°	BIS/CB/CE
120W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°/60°/120°	BIS/CB/CE
150W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°/60°/120°	BIS/CB/CE
200W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°/60°/120°	BIS/CB/CE
240W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°/60°/120°	BIS/CB/CE



## U209 SERIES

- \* 新款超薄工矿灯设计
- \* 高效散热器
- \* 不一样的透镜设计

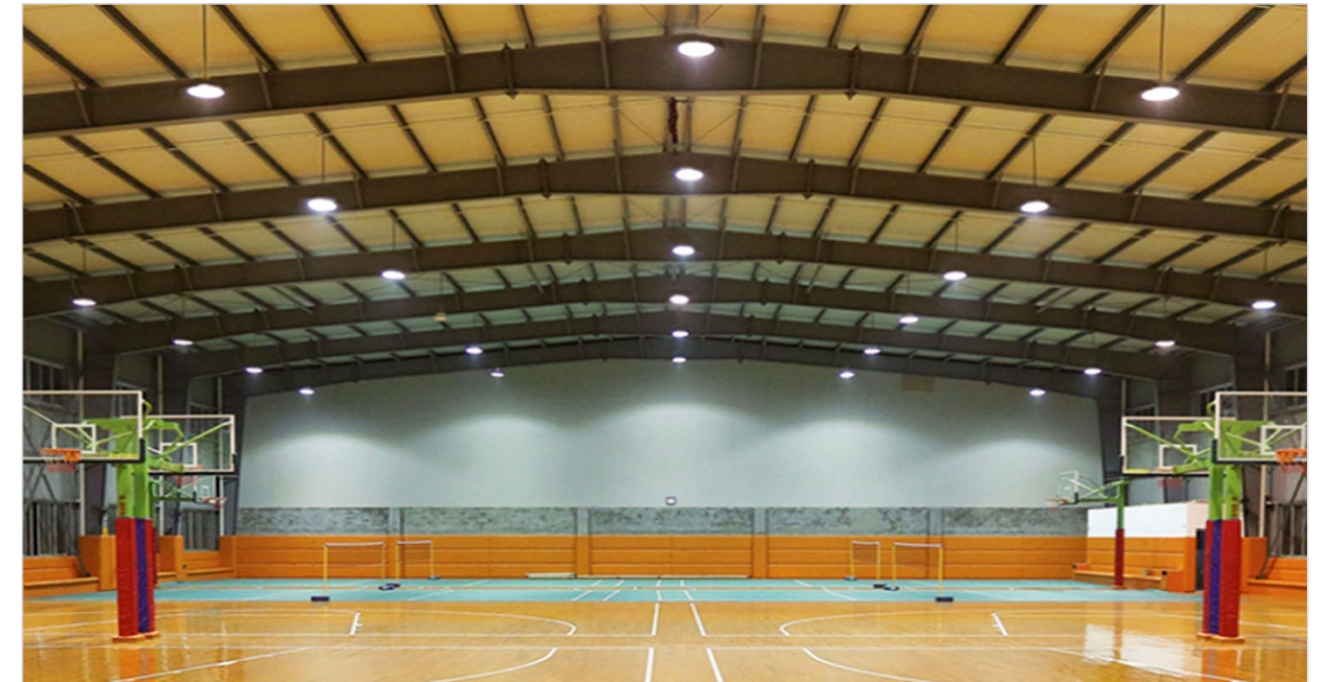

SASO CB IEC60904 IEC60598 CE RoHS

IK08 IP65 UV Proof Salt Spray 240hrs High-low Temp. 500hrs

技术参数									
功率	材质	输入电压	功率因素	灯珠	光效	色显	防水等级	发光角度	认证
100W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°	BIS/CB/CE
150W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°	BIS/CB/CE
200W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°	BIS/CB/CE



## U210 SERIES

- \* 专业设计
- \* 带透镜扩散器
- \* 带罩子
- \* 高质量驱动

SASO CB IEC60335 IEC60598 CE RoHS

IK08 IP65 UV Proof Salt Spray 240hrs High-low Temp. 500hrs

### 技术参数

功率	材质	输入电压	功率因素	灯珠	光效	色显	防水等级	发光角度	认证
100W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°	BIS/CB/CE
150W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°	BIS/CB/CE
200W	铝+透镜	100-270V	0.95	SMD3030	100-170lm/W	70/80	IP65	90°	BIS/CB/CE